


LUXYLED EVO4 & EVO4FR

LINEAR LIGHT


ZERO MODULE TECHNOLOGY

CUT IT WHEREVER YOU WANT

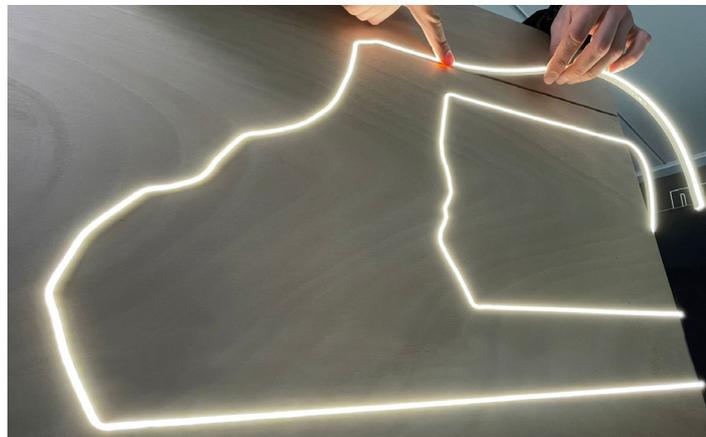

FLEXIBILITY

HI QUALITY SILICON EXTRUSION

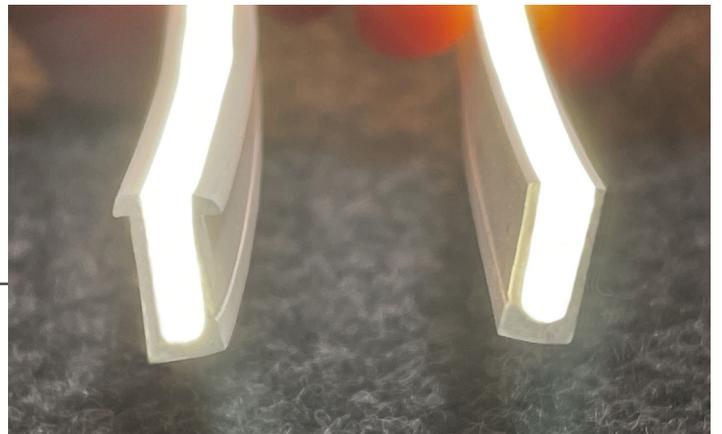

EXTREME THICKNESS

→ 4x8,5mm [0,16x0,33in]



TRANSPARENT CAPS

FOR EXTRA LONG SEAMLESS LIGHT LINE

MAIN CHARACTERISTICS




Rev02

- **ZERO MODULE** / Cut it in any desired point without respecting a cutting unit/module.
- Producibile with a longer terminal, cuttable on field during installation, for a perfect final fitting.
- Transparent end caps for a “zero gap” joint during extra long installations.
- Four different cable exit options.
- Produced through an advanced extra white silicon extrusion process, compared with a traditional PVC sheathing (PVC looks yellowish), lighter in terms of weight, more flexible, strong impact resistant and with a high weather resistance.
- Very slim (4mm width) it allows extreme applications where no other items could be used. Due to its hi flexibilty and dimension, it can reach a reduced bending radius. Available in side bending version.
- Perfectly uniform dot-free smooth and comfortable lighting, up to 20m [65,6ft] in a single piece run length.
- IP67 for indoor and outdoor use, can be installed on surface mount or flush mount configuration.
- UV resistant
- PWM dimmable.
- 5 year warranty (internal use) / 3 years warranty (outdoor use).
- Anodized aluminum fixing channels.

BEST ADVANTAGE





CUT IT WHEREVER YOU NEED

ZERO MODULE is a technology which allows you to **cut LUXYLED wherever you need** without respecting any fixed and predetermined cutting point. Thanks to it, each installation regardless its length and complexity, will be always and constantly perfect.

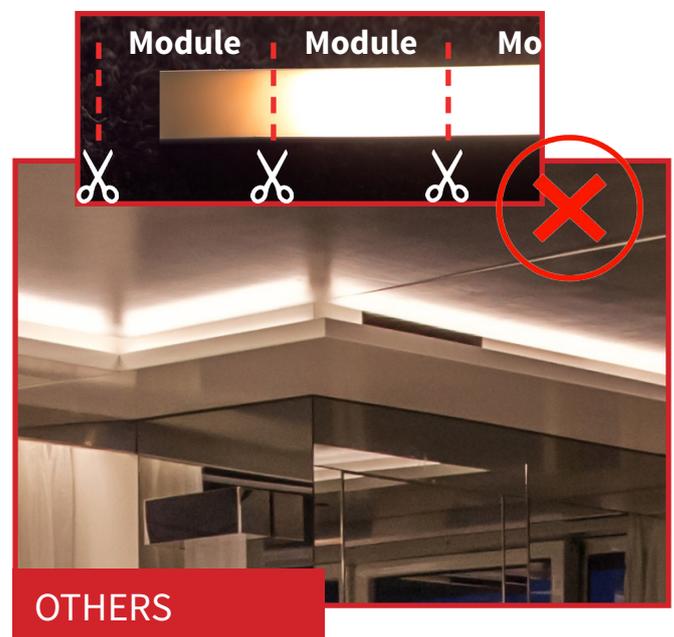


CABLE EXIT



LUXYLED EVO4 - 4x8,5mm [0,16x0,33in]

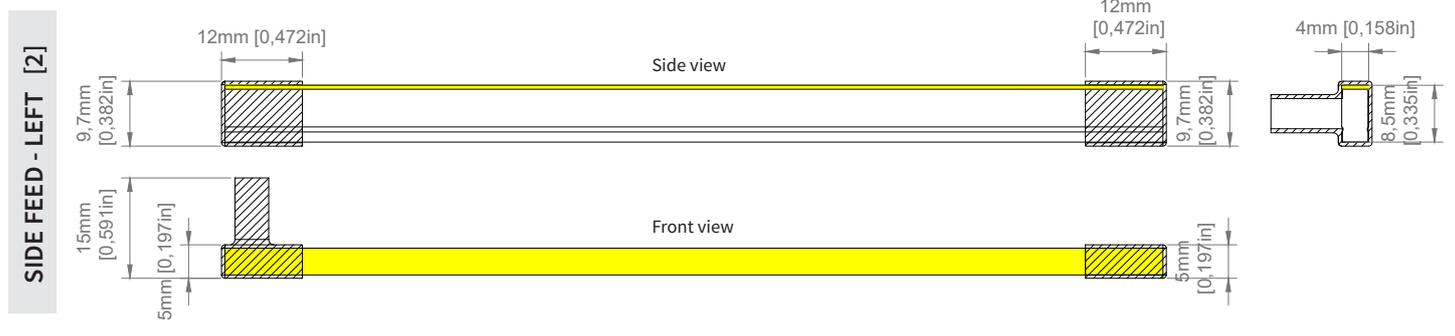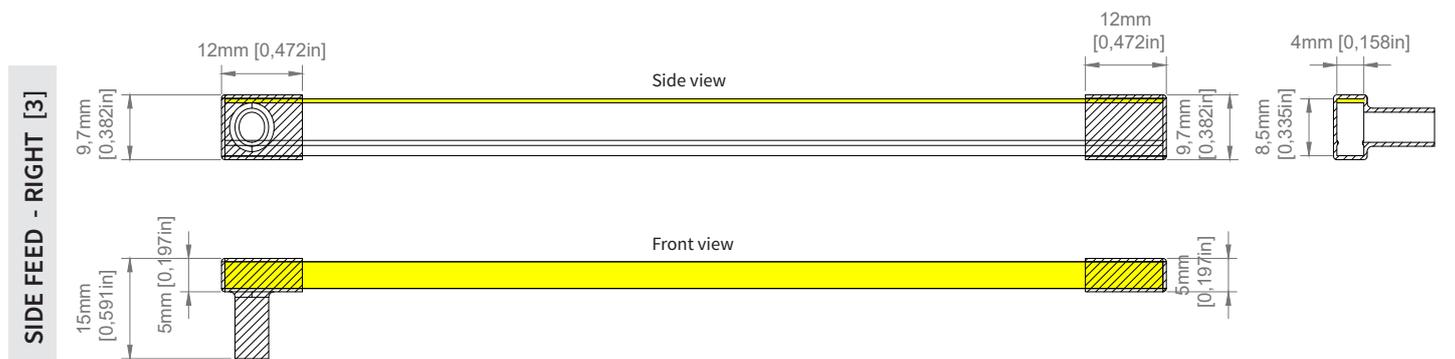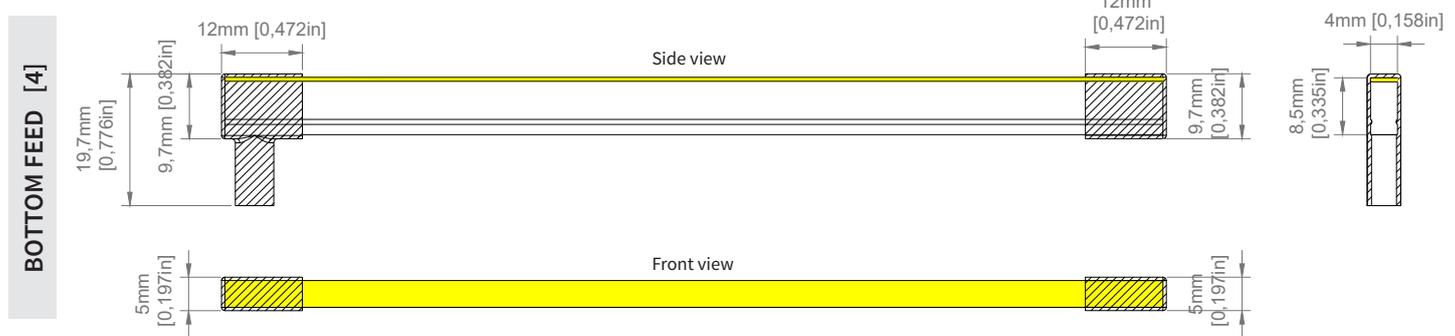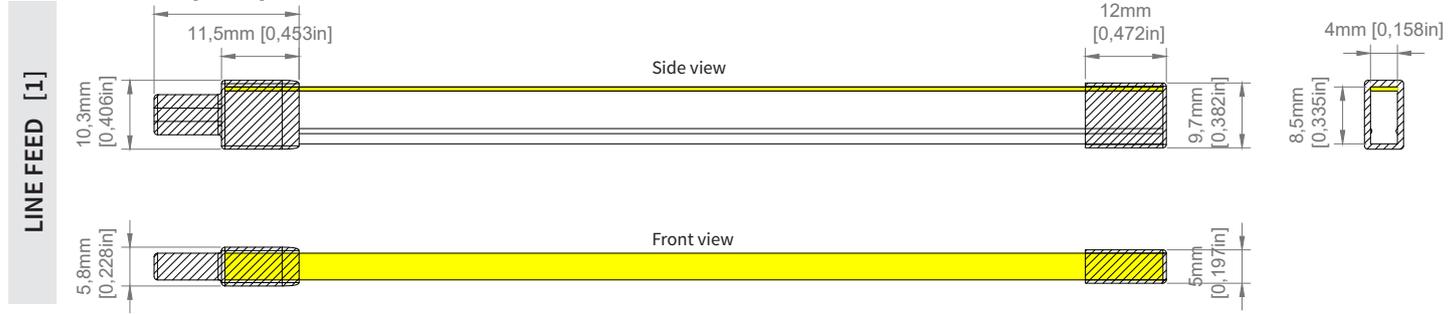

LUXYLED EVO4FR - 4x8,5mm [0,16x0,33in] + FRAMES



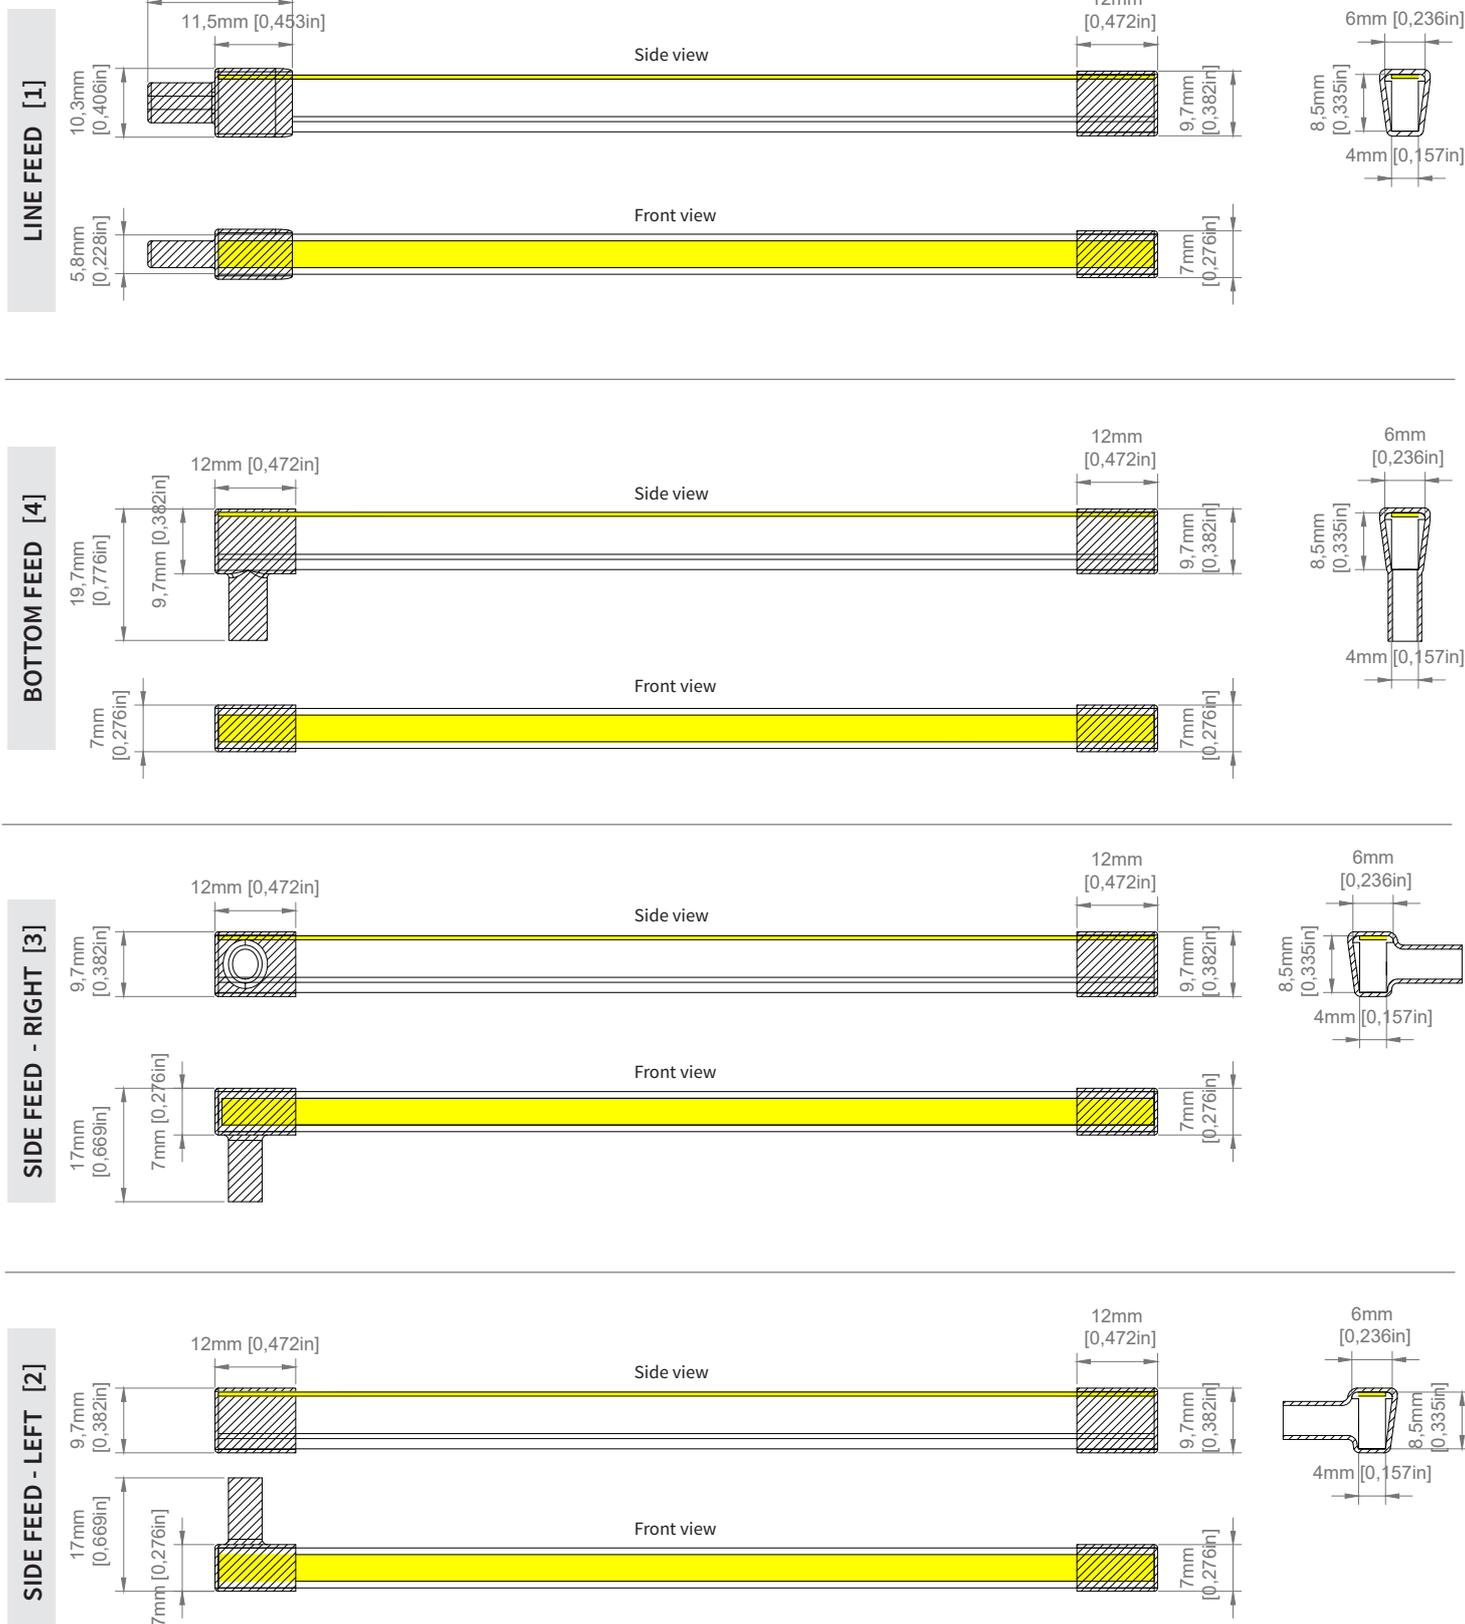


CABLE EXIT OPTIONS

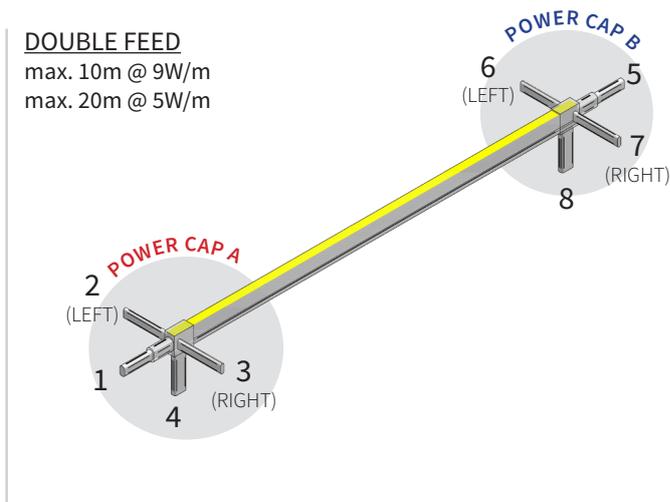
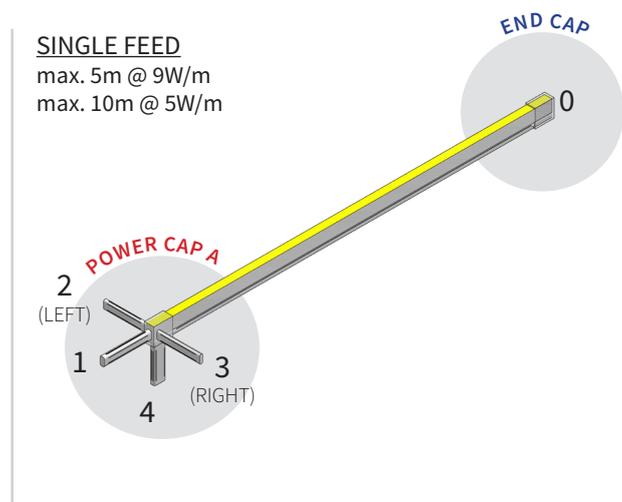


- | | |
|----------------------------|---------------------------------|
| POWER CAP A | POWER CAP B / END CAP |
| 1 - LINE FEED | 0 - END CAP(single feed) |
| 2 - SIDE LEFT FEED | 5 - LINE FEED |
| 3 - SIDE RIGHT FEED | 6 - SIDE LEFT FEED |
| 4 - BOTTOM FEED | 7 - SIDE RIGHT FEED |
| | 8 - BOTTOM FEED |

ZERO GAP

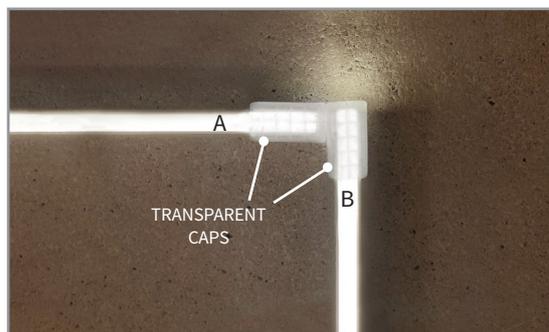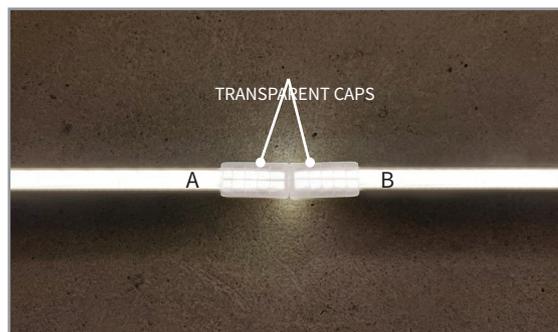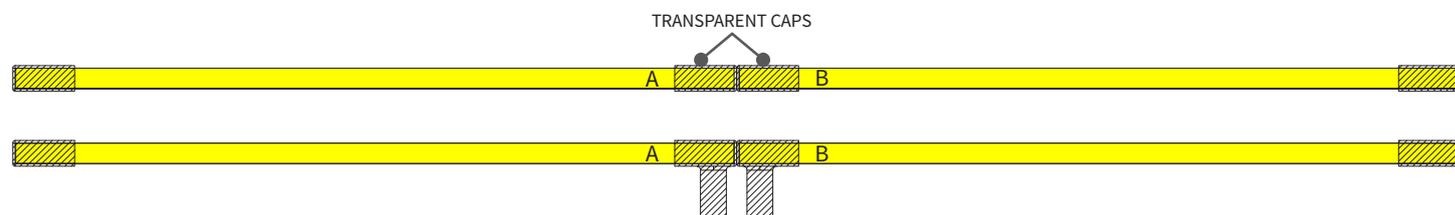


Transparent caps for a “zero gap” joint during extra long installations.

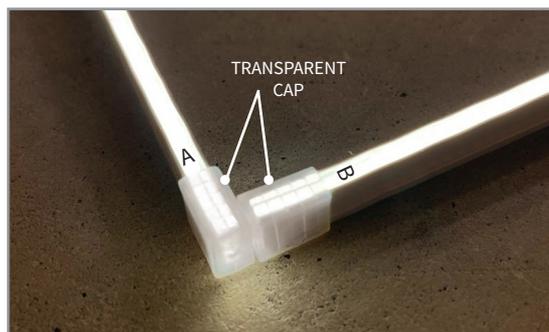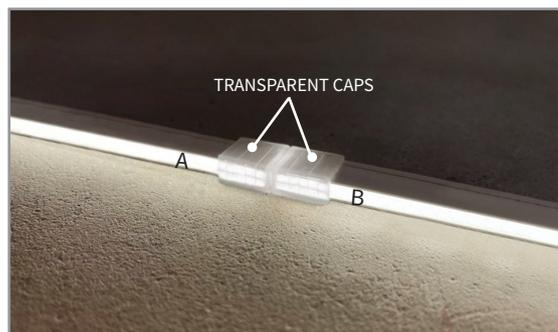

The light shines completely from the top till the end, even if you cut it. That's the reason why any joint, linear or 90° will look continuous.


BENDING RULES

LUXYLED EVO4 & EVO4FR - SIDE BEND MINIMUM BENDING RADIUS $r > 15\text{mm}$ [5,9in]

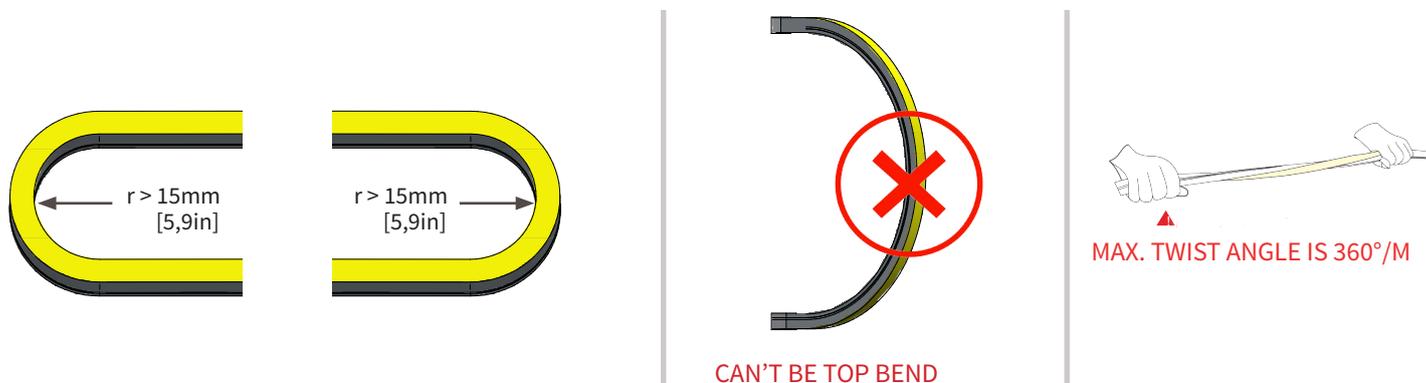


FIXING ACCESSORIES

LUXYLED EVO4 - 4x8,5mm [0,16x0,33in]

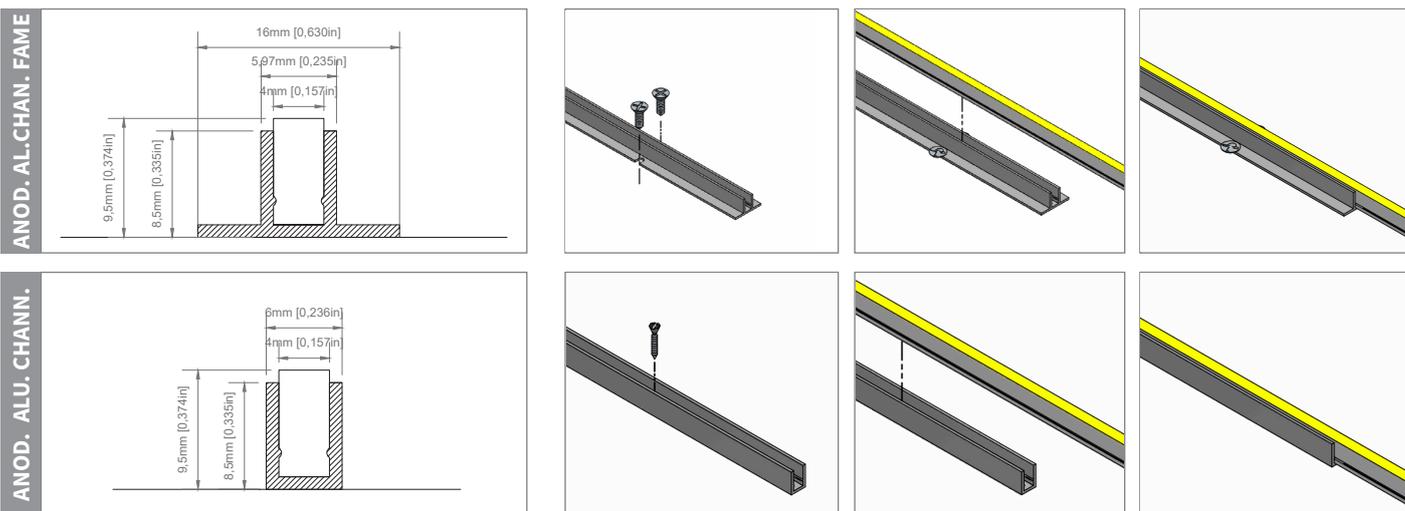

LUXYLED EVO4FR - 4x8,5mm [0,16x0,33in] + FRAMES

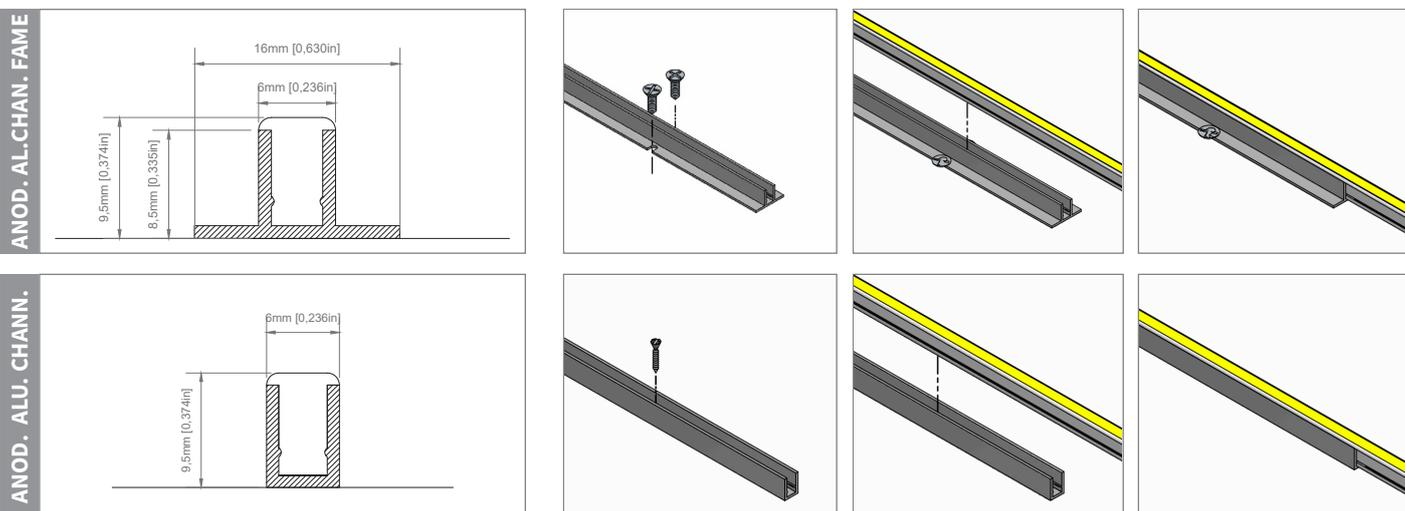

LUXYLED COLLECTION

	SIZE (Light output from W)	SIDE BEND	TOP BEND	MULTI BENDING	ZERO * MODULES	12V	24V	WHITE	TUNABLE WHITE	DIM TO WARM	RGB	RGBW	IP67	LUMEN
LUXYLED EVO3 & 3FR	W3xH6mm W0,12xH0,24in	●	-	-	●	-	●	●	-	-	-	-	●	270 lm/m 82lm/ft (4000K)
LUXYLED EVO4 & 4FR	W4xH8,5mm W0,16xH0,33in	●	-	-	●	●	●	●	-	-	-	-	●	218 lm/m 66lm/ft (4000K)
LUXYLED EVO8	W8xH8mm W0,31xH0,31in	●	●	-	●	-	●	●	-	-	-	-	●	450lm/m 137lm/ft (4000K)
LUXYLED EVO8.5	W8,5xH10mm W0,33xH0,39in	●	●	-	●	●	●	●	-	-	-	-	●	559 lm/m 170lm/ft (4000K)
LUXYLED EVO8.8	W8,8xH16,5mm W0,35xH0,65in	●	-	-	●	-	●	●	-	-	●	●	●	350 lm/m 110lm/ft (3000K)
LUXYLED EVO10 MULTIBENDING	W10xH10mm W0,39xH0,39in	-	-	●	●	-	●	●	-	-	-	-	●	450 lm/m 137m/ft (4000K)
LUXYLED EVO13	W13xH13mm W0,5xH0,5in	●	●	-	●	-	●	●	-	-	●	-	●	830 lm/m 250lm/ft (3000K)
LUXYLED EVO13HE	W13xH13mm W0,5xH0,5in	●	●	-	●	-	●	●	●	-	●	●	●	1200 lm/m 366lm/ft (3000K_TOP)
LUXYLED EVO19 TOP	W20xH20mm W0,79xH0,79in	-	●	-	-	-	●	●	●	●	●	●	●	650lm/m 198lm/ft (4000K)
LUXYLED EVO19 SIDE	W10xH20mm W0,39xH0,79in	●	-	-	●	-	●	●	●	●	●	●	●	535lm/m 160lm/ft (4000K)
LUXYLED EVO OMNIA	W16xH16mm W0,63xH0,63in	-	-	●	●	-	●	●	●	●	●	-	●	840lm/m 260lm/ft (4000K)
LUXYLED EVO OMNIA RGBW	W23xH23mm W0,9xH0,9in	-	-	●	-	-	●	-	-	-	-	●	●	498lm/m 152lm/ft (4000K)
LUXYLED EVO360	Ø 18mm Ø 0,71in	-	-	●	●	-	●	●	-	-	-	-	●	1150lm/m 350lm/ft (4000K)
LUXYLED EVO COBRA	W23xH23mm W0,9xH0,9in	-	-	●	-	-	●	●	●	-	-	-	●	1994lm/m 608lm/ft (4000K)
LUXYLED EVO COBRA RGB/RGBW	W34xH25mm W1,3xH0,98in	-	-	●	-	-	●	-	-	-	●	●	●	1186m/m 361lm/ft (4000K)

ZERO MODULE* technology not available for RBG and RGBW

CHECK HERE LUXYLED APPLICATIONS



SCAN